


ELECTA SPT12-4W

TKS-RFP-03

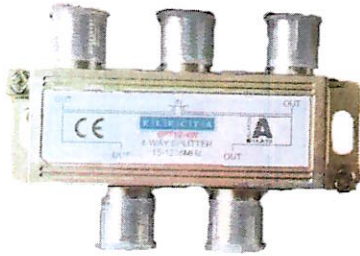

Operating frequency up to 1.2GHz.  
 Full SMT production process.  
 Zinc alloy integrated housing, Plated Nickel  
 Center conductor is Beryllium Copper Plated Gold.  
 Low insertion loss, high isolation.

ITEM	FREQUENCY	
Insertion loss (Min.)	5 ~ 1200 MHz	8.6 dB
Flatness	5 ~ 1200 MHz	1.5dB
	15 ~ 40 MHz	33 dB
Isolation (OUT - OUT Min.)	40 ~ 470 MHz	27 dB
	470 ~ 1000 MHz	23 dB
	1000 ~ 1200 MHz	19 dB
Return loss (IN - OUT Min.)	5 ~ 1200 MHz	16 dB
	5 ~ 30 MHz	85 dB
Screening factor EN 50083/2	30 ~ 470 MHz	80 dB
	470 ~ 1000 MHz	75 dB
	1000 ~ 1200 MHz	75 dB
Impedance		75 Ω
RF connector		F-Male