


TKS-RFP-24 TV-SAT COMBINER

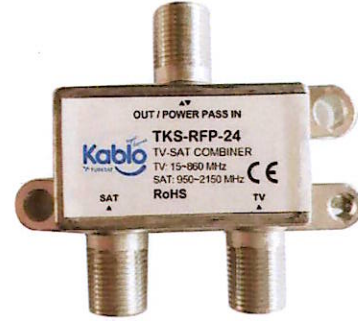

PARAMETER	Ports	Frequency Range	Specifications
Insertion Loss (dB)	IN-ANT	15-860MHz	2.5 dB maximum
		950-2150 MHz	30 dB minimum
	IN-SAT	15-860MHz	25 dB minimum
		950-2150 MHz	2.5 dB maximum
Return Loss (dB)	ANT	15-860MHz	10 dB minimum
	SAT	950-2150 MHz	8 dB minimum
Isolation (dB)	ANT-SAT	15-860MHz	30 dB minimum
		950-2150 MHz	30 dB minimum
Equipment Approval			CE
Screening Effectiveness(dB) (According to EN-50083/2)		5-300	85
		300-470	80
		470-950	75
		950-2150	75
Impedance		5-2150	75Ohm
Frequency Range(MHz)			15-2150 MHz
			ANT(15-860) MHz
			SAT(950-2150) MHz
Connector Type			F-Female
Housing			Min. 1,5um White Bronze/NiSn
Center Conductor			Brass
Blocking Capacitors(Low Band)-ANT			50VDC, maximum
Power Passing-SAT			24VDC,min-1 Amper maks
Dimensions(mm)			20(H)*50(W)*55(L)