


STACK: -2.88 , -0.96 , -2.72 , -0.96 , -2.56 , -0.96 ,

YTBF862/950A TV-SAT COMBINER

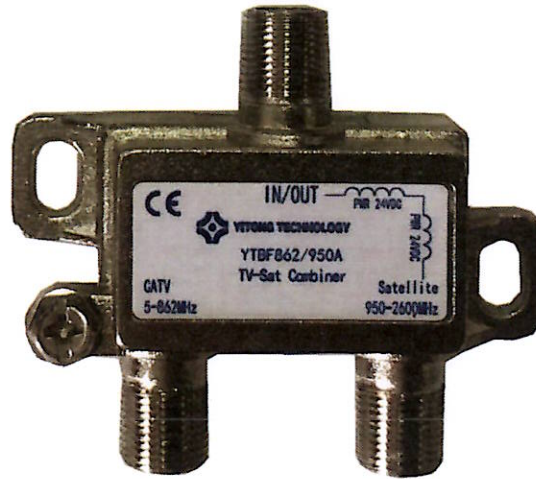

GENERAL SPECIFICATION

TV-SAT COMBINER			
	Ports	Frequency Range	Specifications
Insertion Loss dB.	IN-ANT	15-860 MHz	2,5 dB Max.
		950-2150 MHz	30 dB Min.
	IN-SAT	15-860 MHz	25 dB Min.
		950-2150 MHz	2,5 dB Max.
Return Loss dB.	IN	15-860 MHz	10 dB Min.
	SAT	950-2150 MHz	8 dB Min.
Isolation dB.	ANT-SAT	15-860 MHz	30 dB Min.
		950-2150 MHz	30 dB Min.
Screening effectiveness EN 50083/2	5-300	85 dB.	
	300-470	80 dB.	
	470-950	75 dB.	
	950-1218	55 dB.	

Frequency Range	15-2150 MHz ANT (15-860) SAT (950-2150) MHz
Impedance	75 ohm
Blocking Capacitors (Low Band)-ANT	50 VDC
Connector	F-Female
Housing	Min. 1.5µm NiSn plated
Center conductor	Tin plated beryllium copper
Power Pasing-SAT	24 VDC min.- 1 Amper maks.

Jiangsu YiTong High Tech Co., Ltd.

Factory Address: No.28 Tonglin Road , Changshu , China (215500)

Tel: +86-158-9561-1268 Fax: +86 512 52818006

Website: <http://en.yitong-group.com/> ; Alibaba website : <http://jsyitong.en.alibaba.com/>