



CENKABLO A.Ş.



TÜRKSAT KODU :TKS-FOM-20

TÜRKSAT KODU :TKS-FOM-21

TÜRKSAT KODU :TKS-FOM-22

TÜRKSATKODU:TKS-FOM-46

12 - 72 PORT FİBER OPTİK KABLO EK KUTUSU (1-6 KASETLİ) BS604A



- Dimensions (mm): 522(L) 208(W) .174(H)
- Capacity: up to 96 fibers (for loose tube type cable)
- No. of Enclosed Splice Tray: max. 4pcs
- Efficient cable splicing with dome type body
- Weight : approx. 2.6kg






CENKABLO A.Ş



TÜRKSAT KODU :TKS-FOM-23

96 PORT FİBER OPTİK KABLO EK KUTUSU (4 KASETLİ) BS604C

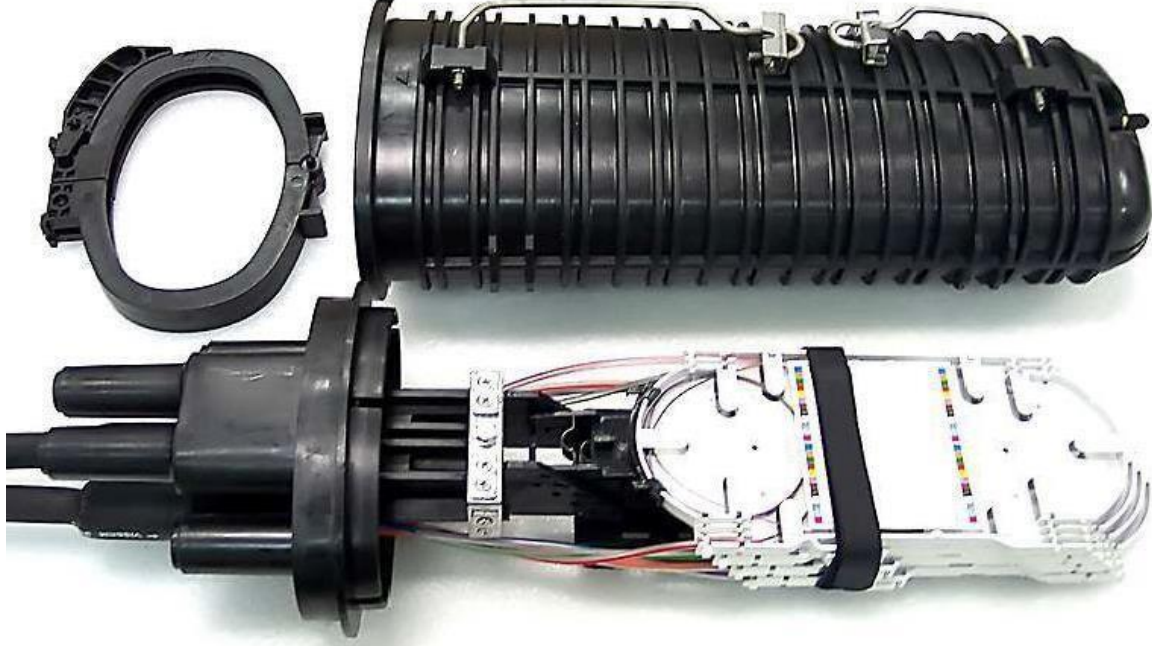

Size (L*W*H) 577*211*174mm

Weight (kg) 2.5

Inlet ports(Max) 6 (Oval. 2)

Cable Dia. (mm) $\Phi 8 \sim \Phi 24$

No. of splice tray 4

Tray capacity 24F (Max. 48F)

Splice capacity 96F (Max. 192F)

Splice method Fusion, Mechanical

Splice protector Heat shrinkable sleeve, Mechanical splice

Tension member Galvanized steel wire, FRP



CENKABLO A.Ş



TÜRKSAT KODU :TKS-FOM-24

216 PORT FİBER OPTİK KABLO EK KUTUSU (9 KASETLİ) BS712A



Size (L*W*H) 515*252mm

Weight (kg) 3.5

Inlet ports(Max) 7 (Oval. 1)

Cable Dia. (mm) $\Phi 8 \sim \Phi 30$

No. of splice tray 12

Tray capacity 24F (Max. 48F)

Splice capacity 288F (Max. 576F)

Splice method Fusion, Mechanical

Splice protector Heat shrinkable sleeve, Mechanical splice


Tension member Galvanized steel wire, FRP



CENKABLO A.Ş

TÜRKSAT KODU :TKS-FOM-26

DAHİLİ 12 PORT FİBER OPTİK KABLO EK KUTUSU (OTB-P)

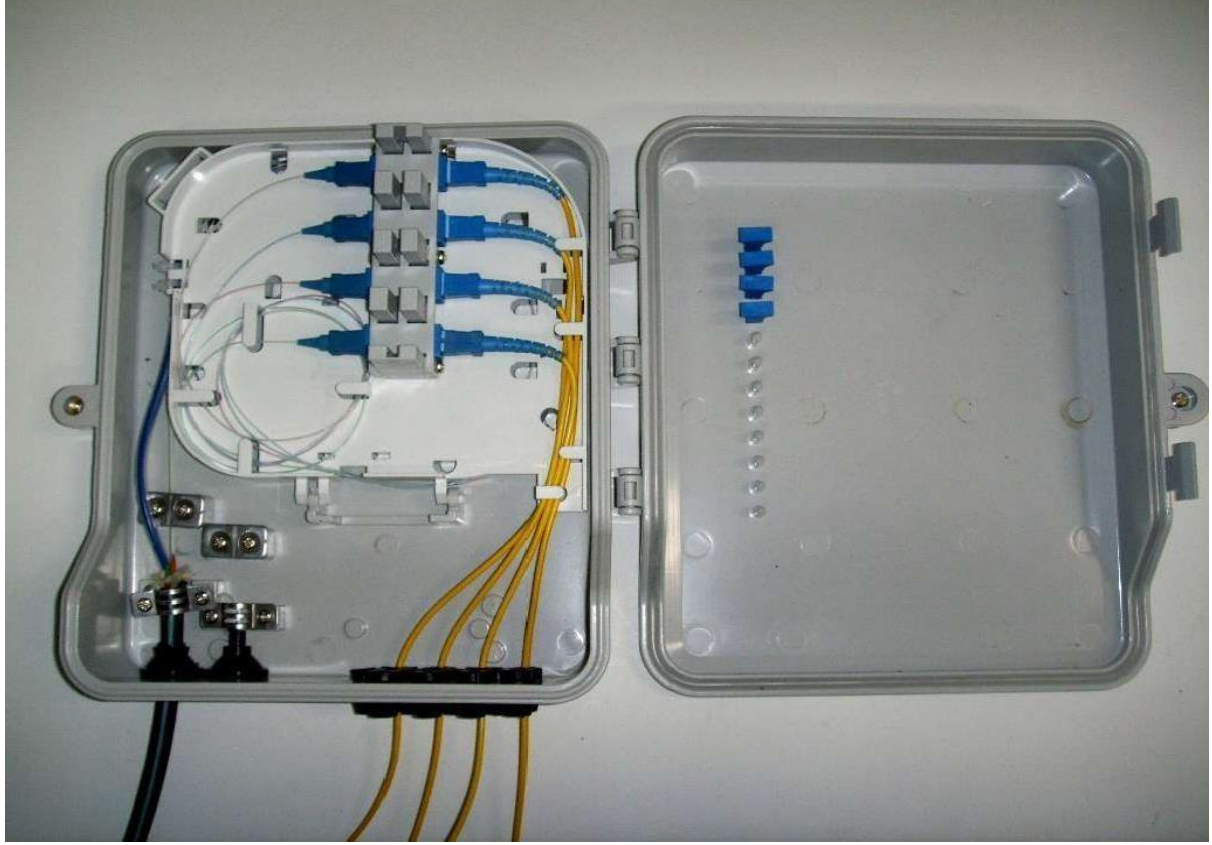

Item	OTB-P
Size(mm)	193 x 228 x 62
Weight (kg)	1.5
Inlet Port	Main 2 +Drop 12
Cable Dia (mm)	Ø3.5 ~ Ø13mm
Type of Adaptor	SC/LC
Tray Capacity	12C
Lock method	Hook + Lock
Splicing method	Fusion, Mechanical
Splice Protector	Heat shrinkable sleeve
Main Material	PC/ABS